

Bourdon tube pressure gauge, copper alloy

Standard version

Models 111.10, 111.12

WIKA data sheet PM 01.01



For further approvals,
see page 6

Applications

- For gaseous and liquid media that are not highly viscous or crystallising and will not attack copper alloy parts
- Pneumatics
- Heating and air-conditioning technology
- Medical engineering

Special features

- Reliable and cost-effective
- Design per EN 837-1 or ASME B40.100
- Nominal size 40 [1 ½"], 50 [2"], 63 [2 ½"], 80 [3"], 100 [4"] and 160 [6"]
- Scale ranges to 0 ... 400 bar [0 ... 6,000 psi]



Fig. left: model 111.12, back mount

Fig. right: model 111.10, lower mount (radial)

Configurator



Standard articles



Description

The model 111 pressure gauges are based on the proven Bourdon tube measuring system. The deflection of the Bourdon tube is transmitted to a movement and indicated.

The modular design enables a multitude of combinations of case materials, process connections, nominal sizes and scale ranges. Due to the high variance, the instrument is suitable for use in a wide range of applications within industry.

For mounting in control panels, the pressure gauges can, depending on the process connection, be fitted with a surface mounting flange or with a triangular profile ring and mounting bracket.

The standard version of the model 111 is manufactured, cost-optimised on modern production lines, in volumes of several million instruments per year.

Specifications

Basic information	
Standard	■ EN 837-1 ■ ASME B40.100 → For information on the "Selection, installation, handling and operation of pressure gauges", see technical information IN 00.05.
Further version	■ For closed heating systems Instrument with red mark pointer and adjustable green sector, scale range 0 ... 4 bar, red mark at 2.5 or 3 bar ■ For water level indication (hydrometer) and heating systems Scale ranges 0 ... 0.6 to 0 ... 25 bar, with second scale in mWS and red mark pointer
Nominal size (NS)	■ Ø 40 mm [1 ½"] ■ Ø 50 mm [2"] ■ Ø 63 mm [2 ½"] ■ Ø 80 mm [3"] ■ Ø 100 mm [4"] ■ Ø 160 mm [6"] (only for model 111.10 with steel case)
Connection location	■ Lower mount (radial) ■ Centre back mount ¹⁾
Window ²⁾	Plastic, crystal-clear, snap-fitted in case
Case	
Design	■ Without safety level ■ Safety level "S1" per EN 837-1: with blow-out device
Material ³⁾	■ Plastic, black ■ Steel, black
Mounting	■ Without ■ Panel mounting flange ■ Surface mounting flange ⁴⁾ ■ Triangular profile ring with mounting bracket ⁵⁾
Movement	Copper alloy

1) Not available for NS 160 [6"]

2) Model 111.10, NS 160 [6"]: instrument glass

3) Model 111.10, NS 160 [6"] and model 111.12, NS 100 [4"]: steel, black

4) Not available for NS 40 [1 ½"], NS 50 [2"] and NS 160 [6"]

5) Not available for NS 40 [1 ½"], NS 50 [2"] and NS 63 [2 ½"]

Measuring element	
Type of measuring element	Bourdon tube, C-type or helical type
Material	Copper alloy
Leak tightness	Leakage rate: < 5 · 10 ⁻³ mbar l/s

Accuracy specifications	
Accuracy class	
EN 837-1	■ Class 1.6 ■ Class 2.5
ASME B40.100	Grade B
Temperature error	On deviation from the reference conditions at the measuring system: ≤ ±0.4 % per 10 °C [≤ ±0.4 % per 18 °F] of full scale value
Reference conditions	
Ambient temperature	+20 °C [68 °F]

Scale ranges

bar	
0 ... 0.6	0 ... 25
0 ... 1	0 ... 40
0 ... 1.6	0 ... 60 ¹⁾
0 ... 2.5	0 ... 100 ¹⁾
0 ... 4	0 ... 160 ¹⁾
0 ... 6	0 ... 250 ¹⁾
0 ... 10	0 ... 315 ¹⁾
0 ... 16	0 ... 400 ¹⁾
0 ... 20	-

kPa	
0 ... 60	0 ... 2,500
0 ... 100	0 ... 4,000
0 ... 160	0 ... 6,000 ¹⁾
0 ... 250	0 ... 10,000 ¹⁾
0 ... 400	0 ... 16,000 ¹⁾
0 ... 600	0 ... 25,000 ¹⁾
0 ... 1,000	0 ... 31,500 ¹⁾
0 ... 1,600	0 ... 40,000 ¹⁾
0 ... 2,000	-

psi	
0 ... 10	0 ... 500
0 ... 15	0 ... 600 ¹⁾
0 ... 30	0 ... 800 ¹⁾
0 ... 60	0 ... 1,000 ¹⁾
0 ... 100	0 ... 1,500 ¹⁾
0 ... 150	0 ... 2,000 ¹⁾
0 ... 160	0 ... 3,000 ¹⁾
0 ... 200	0 ... 4,000 ¹⁾
0 ... 300	0 ... 5,000 ¹⁾
0 ... 400	0 ... 6,000 ¹⁾

1) Not available for NS 160 [6"]

kg/cm ²	
0 ... 0.6	0 ... 25
0 ... 1	0 ... 40
0 ... 1.6	0 ... 60 ¹⁾
0 ... 2.5	0 ... 100 ¹⁾
0 ... 4	0 ... 160 ¹⁾
0 ... 6	0 ... 250 ¹⁾
0 ... 10	0 ... 315 ¹⁾
0 ... 16	0 ... 400 ¹⁾
0 ... 20	-

MPa	
0 ... 0.06	0 ... 2.5
0 ... 0.1	0 ... 4
0 ... 0.16	0 ... 6 ¹⁾
0 ... 0.25	0 ... 10 ¹⁾
0 ... 0.4	0 ... 16 ¹⁾
0 ... 0.6	0 ... 25 ¹⁾
0 ... 1	0 ... 31.5 ¹⁾
0 ... 1.6	0 ... 40 ¹⁾
0 ... 2.0	-

Vacuum and compound scale ranges

bar	
-0.6 ... 0 ¹⁾	-1 ... +5
-1 ... 0	-1 ... +9
-1 ... +0.6	-1 ... +15
-1 ... +1.5	-1 ... +24
-1 ... +3	-1 ... +30

MPa	
-0.06 ... 0 ¹⁾	-0.1 ... +0.5
-0.1 ... 0	-0.1 ... +0.9
-0.1 ... +0.06	-0.1 ... +1.5
-0.1 ... +0.15	-0.1 ... +2.4
-0.1 ... +0.3	-0.1 ... +3

kPa	
-60 ... 0 ¹⁾	-100 ... +500
-100 ... 0	-100 ... +900
-100 ... +60	-100 ... +1,500
-100 ... +150	-100 ... +2,400
-100 ... +300	-100 ... +3,000

psi	
-15 inHg ... 0 ¹⁾	-30 inHg ... +100
-30 inHg ... 0	-30 inHg ... +160
-30 inHg ... +15	-30 inHg ... +200
-30 inHg ... +30	-30 inHg ... +300
-30 inHg ... +60	-30 inHg ... +400

1) Not available for NS 160 [6"]

→ Other scale ranges on request

Further details on: scale ranges		
Unit	■ bar ■ psi ■ kg/cm² ■ kPa ■ MPa	
Increased overload safety	■ Without ■ 1.6 times ■ 2 times The possibility of selection depends on scale range and nominal size	
Vacuum resistance	■ Without ■ Vacuum-resistant to -1 bar	
Dial		
Scale colour	Black	
Material	NS 40 [1 ½"], 50 [2"], 63 [2 ½"]	Plastic, white
	NS 80 [3"], 100 [4"], 160 [6"]	Aluminium, white
Customer-specific version	■ Without ■ With temperature scale for refrigerant, e.g. for NH₃: R 717	
	Other scales, e.g. with red mark, circular arcs or circular sectors, on request → Alternatively, adhesive label set for red and green circular arcs; see data sheet AC 08.03	
Pointer		
Instrument pointer	NS 40 [1 ½"] ... 100 [4"]	Plastic, black
	NS 160 [6"]	Aluminium, black
Mark pointer/drag pointer	■ Without ■ Red mark pointer on dial, fixed ¹⁾ ■ Red mark pointer on window, adjustable	
Pointer stop pin	■ Without ■ At zero point	

1) Red mark pointer with measuring ranges 0 ... 0.6 to 0 ... 60 bar

Process connection	
Standard	■ EN 837-1 ■ ISO 7 ■ ANSI/B1.20.1
Size	
EN 837-1	■ G 1/8 B, male thread ■ G 1/4 B, male thread ■ G 1/2 B, male thread ¹⁾
ANSI/B1.20.1	■ 1/8 NPT, male thread ■ 1/4 NPT, male thread ■ 1/2 NPT, male thread ¹⁾
ISO 7	■ R 1/8, male thread ■ R 1/4, male thread ■ R 1/2, male thread ¹⁾
Restrictor	■ Without ■ Ø 0.5 mm [0.02"], copper alloy ■ Ø 0.3 mm [0.012"], copper alloy
Material (wetted)	
Process connection	Copper alloy
Bourdon tube	Copper alloy

1) Not available for NS 40 [1 1/2"], NS 50 [2"] and NS 63 [2 1/2"]

→ Other process connections on request

Operating conditions		
Medium temperature	-20 ... +60 °C [-4 ... +140 °F]	
Ambient temperature	-20 ... +60 °C [-4 ... +140 °F]	
Pressure limitation		
Steady	3/4 x full scale value	
Fluctuating	2/3 x full scale value	
Short time	Full scale value	
Ingress protection per IEC/EN 60529		
Model 111.10	NS 40 [1 1/2"], NS 50 [2"], NS 63 [2 1/2"]	IP33
	NS 80 [3"], NS 100 [4"], NS 160 [6"]	IP44
Model 111.12	NS 40 [1 1/2"], NS 50 [2"], NS 63 [2 1/2"]	IP41 ¹⁾
	NS 80 [3"], NS 100 [4"]	IP42

1) Ingress protection IP44 for steel case

Approvals

Logo	Description	Country
	EU declaration of conformity Pressure equipment directive PS > 200 bar, module A, pressure accessory	European Union
-	CRN Safety (e.g. electr. safety, overpressure, ...)	Canada

Optional approvals

Logo	Description	Country
	PAC Kazakhstan Metrology, measurement technology	Kazakhstan
-	MChS Permission for commissioning	Kazakhstan
-	PAC Ukraine Metrology, measurement technology	Ukraine
	PAC Uzbekistan Metrology, measurement technology	Uzbekistan
-	PAC China Metrology, measurement technology	China
-	FM ¹⁾ FM 2311, Use in fire protection systems	International
	UL ¹⁾ UL 393, Use in fire protection systems	International
	NSF NSF/ANSI 61 G and NSF/ANSI 372 Drinking water system components - Health effects	USA and Canada

1) Only available for NS 100 [4"] with selected scale ranges and process connections

Manufacturer's declaration

Logo	Description
-	Pressure Equipment Directive (PED) for maximum allowable pressure $PS \leq 200$ bar
-	Suitability of wetted materials for drinking water in accordance with the European 4MS initiative

Certificates


Certificates	
Certificates	■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy) ■ 3.1 inspection certificate per EN 10204 (e.g. indication accuracy)
Recommended calibration interval	1 year (dependent on conditions of use)

→ For approvals and certificates, see website


Dimensions in mm [in]

Model 111.10, lower mount (radial), plastic case

Instruments with SW = 14 [0.55]

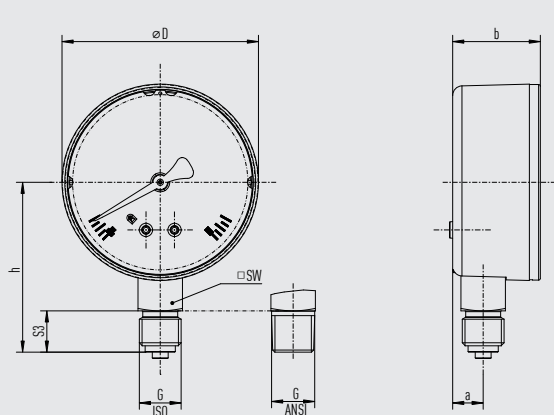

Instruments with SW = 22 [0.87]

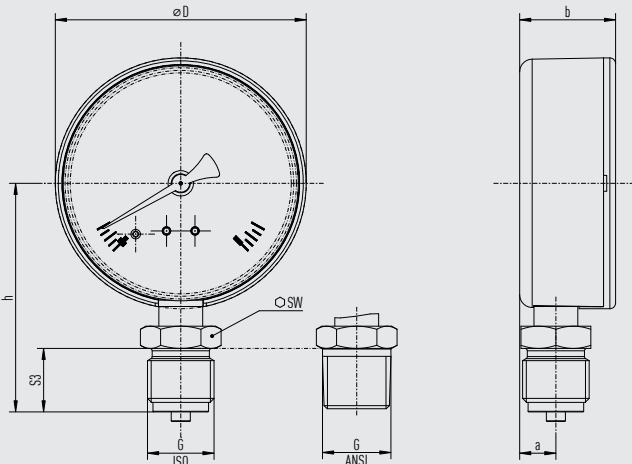

31132006.03

NS	G ¹⁾	Dimensions in mm [in]					
		h ±1 [0.04]	S3	a	b ±0.5 [0.02]	D	SW
40 [1 ½"]	G ⅝ B, ⅙ NPT, R ⅙	36 [1.42]	10 [0.39]	9.5 [0.37]	26.5 [14]	39 [1.54]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	39 [1.54]	13 [0.51]	9.5 [0.37]	26.5 [14]	39 [1.54]	14 [0.55]
50 [2"]	G ⅝ B, ⅙ NPT, R ⅙	42 [1.65]	10 [0.39]	10 [0.39]	27.5 [18]	49 [1.93]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	45 [1.77]	13 [0.51]	10 [0.39]	27.5 [18]	49 [1.93]	14 [0.55]
63 [2 ½"]	G ⅝ B, ⅙ NPT, R ⅙	50,5 [1.99]	10 [0.39]	9.5 [0.37]	27.5 [18]	62 [2.44]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	53.5 [2.11]	13 [0.51]	9.5 [0.37]	27.5 [18]	62 [2.44]	14 [0.55]
80 [3"]	G ⅝ B, ⅙ NPT, R ⅙	58 [2.28]	10 [0.39]	11.5 [0.45]	30 [1.18]	79 [3.11]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	61 [2.40]	13 [0.51]	11.5 [0.45]	30 [1.18]	79 [3.11]	14 [0.55]
	G ½ B	72 [2.83]	20 [0.79]	11.5 [0.45]	30 [1.18]	79 [3.11]	22 [0.87]
	½ NPT, R ½	71 [2.80]	19 [0.75]	11.5 [0.45]	30 [1.18]	79 [3.11]	22 [0.87]
100 [4"]	G ⅝ B, ⅙ NPT, R ⅙	68 [2.68]	10 [0.39]	11.5 [0.45]	30.5 [1.2]	99 [3.90]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	71 [2.80]	13 [0.51]	11.5 [0.45]	30.5 [1.2]	99 [3.90]	14 [0.55]
	G ½ B	83.5 [3.29]	20 [0.79]	11.5 [0.45]	30.5 [1.2]	99 [3.90]	22 [0.87]
	½ NPT, R ½	82.5 [3.25]	19 [0.75]	11.5 [0.45]	30.5 [1.2]	99 [3.90]	22 [0.87]

1) The G ⅝ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

NS	Weight in kg [lb]
40 [1 ½"]	0.08 [0.18]
50 [2"]	0.10 [0.22]
63 [2 ½"]	0.13 [0.29]
80 [3"]	0.18 [0.40]
100 [4"]	0.21 [0.46]

Model 111.10, lower mount (radial), steel case


Instruments with SW = 14 [0.55]

NS 40 [2 ½"] ... 100 [4"]

Instruments with SW = 22 [0.87]

NS 160 [6"]

NS 100 [4"]

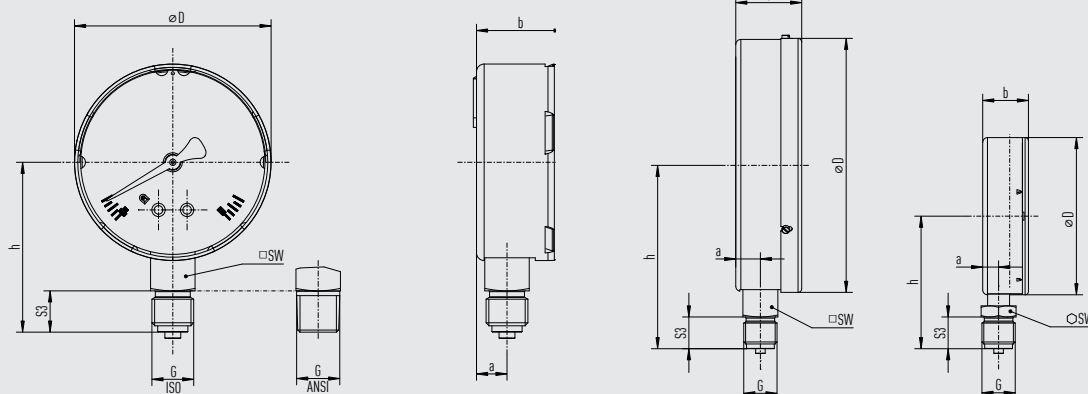


31132006.03

NS	G ¹⁾	Dimensions in mm [in]					
		h ±1 [0.04]	S3	a	b ±0.5 [0.02]	D	SW
40 [1 ½"]	G ⅜ B, ⅛ NPT, R ⅛	36 [1.42]	10 [0.39]	9.5 [0.37]	26 [1.02]	39 [1.54]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	39 [1.54]	13 [0.51]	9.5 [0.37]	26 [1.02]	39 [1.54]	14 [0.55]
50 [2"]	G ⅜ B, ⅛ NPT, R ⅛	42 [1.65]	10 [0.39]	9.5 [0.37]	28 [1.10]	49 [1.93]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	45 [1.77]	13 [0.51]	9.5 [0.37]	28 [1.10]	49 [1.93]	14 [0.55]
63 [2 ½"]	G ⅜ B, ⅛ NPT, R ⅛	50.5 [1.99]	10 [0.39]	9.5 [0.37]	28 [1.10]	61.9 [2.44]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	53.5 [2.11]	13 [0.51]	9.5 [0.37]	28 [1.10]	61.9 [2.44]	14 [0.55]
80 [3"]	G ⅜ B, ⅛ NPT, R ⅛	58 [2.28]	10 [0.39]	10 [0.39]	29 [1.14]	79 [3.11]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	61 [2.40]	13 [0.51]	10 [0.39]	29 [1.14]	79 [3.11]	14 [0.55]
	G ½ B	72 [2.83]	20 [0.79]	10 [0.39]	29 [1.14]	79 [3.11]	22 [0.87]
	½ NPT, R ½	71 [2.79]	19 [0.75]	10 [0.39]	29 [1.14]	79 [3.11]	22 [0.87]
100 [4"]	G ⅜ B, ⅛ NPT, R ⅛	68 [2.68]	10 [0.39]	10 [0.39]	29 [1.14]	99 [3.90]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	71 [2.80]	13 [0.51]	10 [0.39]	29 [1.14]	99 [3.90]	14 [0.55]
	G ½ B	83.5 [3.29]	20 [0.79]	10 [0.39]	29 [1.14]	99 [3.90]	22 [0.87]
	½ NPT, R ½	82.5 [3.25]	19 [0.75]	10 [0.39]	29 [1.14]	160 [6.30]	22 [0.87]
160 [6"]	G ½ B	115.5 [4.55]	20 [0.79]	15.5 [0.61]	41.5 [1.63]	160 [6.30]	22 [0.87]
	½ NPT, R ½	114.5 [4.51]	19 [0.75]	15.5 [0.61]	41.5 [1.63]	160 [6.30]	22 [0.87]

1) The G ⅜ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

NS	Weight in kg [lb]
40 [1 ½"]	0.09 [0.2]
50 [2"]	0.11 [0.24]
63 [2 ½"]	0.15 [0.33]
80 [3"]	0.26 [0.57]
100 [4"]	0.31 [0.68]
160 [6"]	0.88 [1.94]

Model 111.12, centre back mount, plastic case

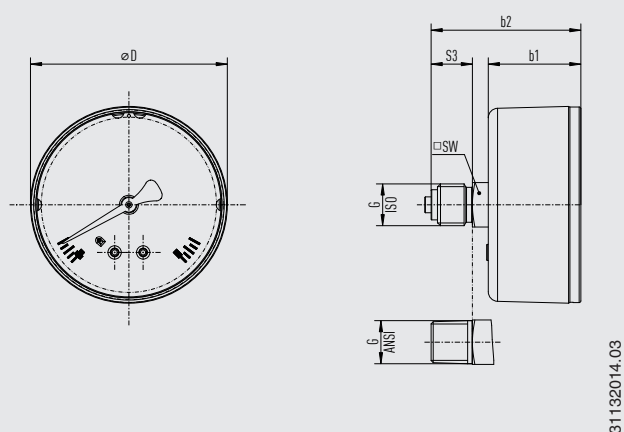


NS	G ¹⁾	Dimensions in mm [in]				
		b1 ±0.5 [0.02]	b2 ±1 [0.04]	S3	D	SW
40 [1 ½"]	G ½ B, ½ NPT, R ½	26.5 [1.04]	42 [1.65]	10 [0.39]	39 [1.53]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	26.5 [1.04]	45 [1.77]	13 [0.51]	39 [1.53]	14 [0.55]
50 [2"]	G ½ B, ½ NPT, R ½	29.5 [1.87]	44.5 [1.75]	10 [0.39]	49 [1.93]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	29.5 [1.87]	47.5 [1.87]	13 [0.51]	49 [1.93]	14 [0.55]
63 [2 ½"]	G ½ B, ½ NPT, R ½	29 [1.15]	44 [1.73]	10 [0.39]	62 [2.44]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	29 [1.15]	47 [1.85]	13 [0.51]	62 [2.44]	14 [0.55]
80 [3"]	G ½ B, ½ NPT, R ½	32 [1.25]	46 [1.81]	10 [0.39]	79 [3.11]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	32 [1.25]	49 [1.92]	13 [0.51]	79 [3.11]	14 [0.55]
	G ½ B, ½ NPT, R ½	32 [1.25]	55 [2.17]	19 [0.75]	79 [3.11]	14 [0.55]

1) The G ½ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

NS	Weight in kg [lb]
40 [1 ½"]	0.06 [0.13]
50 [2"]	0.07 [0.15]
63 [2 ½"]	0.08 [0.18]
80 [3"]	0.11 [0.24]

Model 111.12, centre back mount, steel case

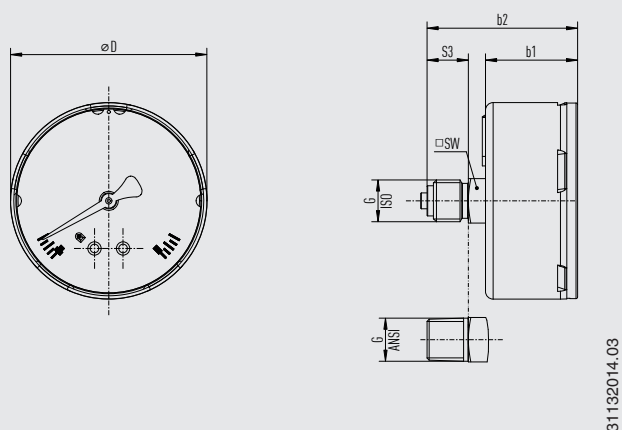

31132014.03

NS	G ¹⁾	Dimensions in mm [in]				
		b1 ±0.5 [0.02]	b2 ±1 [0.04]	S3	D	SW
40 [1 ½"]	G ⅝ B, ⅝ NPT, R ⅝	26 [1.02]	41,5 [1.63]	10 [0.39]	39 [1.53]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	26 [1.02]	45 [1.77]	13 [0.51]	39 [1.53]	14 [0.55]
50 [2"]	G ⅝ B, ⅝ NPT, R ⅝	27.5 [1.10]	43 [1.69]	10 [0.39]	49 [1.93]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	27.5 [1.10]	46 [1.81]	13 [0.51]	49 [1.93]	14 [0.55]
63 [2 ½"]	G ⅝ B, ⅝ NPT, R ⅝	29 [1.14]	44.5 [1.75]	10 [0.39]	62 [2.44]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	29 [1.14]	47.5 [1.87]	13 [0.51]	62 [2.44]	14 [0.55]
80 [3"]	G ⅝ B, ⅝ NPT, R ⅝	31 [1.22]	46 [1.81]	10 [0.39]	79 [3.11]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	31 [1.22]	49 [1.93]	13 [0.51]	79 [3.11]	14 [0.55]
	G ½ B, ½ NPT, R ½	31 [1.22]	55 [2.16]	19 [0.75]	79 [3.11]	14 [0.55]
100 [4"]	G ⅝ B, ⅝ NPT, R ⅝	31 [1.22]	46 [1.81]	10 [0.39]	99 [3.90]	14 [0.55]
	G ¼ B, ¼ NPT, R ¼	31 [1.22]	49 [1.93]	13 [0.51]	99 [3.90]	14 [0.55]
	G ½ B, ½ NPT, R ½	31 [1.22]	55 [2.16]	19 [0.75]	99 [3.90]	14 [0.55]

1) The G ⅝ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

NS	Weight in kg [lb]
40 [1 ½"]	0.07 [0.15]
50 [2"]	0.1 [0.22]
63 [2 ½"]	0.15 [0.33]
80 [3"]	0.27 [0.6]
100 [4"]	0.37 [0.82]

Accessories and spare parts

Model	Description	
	910.33	Adhesive label set for red and green circular arcs → See data sheet AC 08.03
	910.17	Seals → See data sheet AC 09.08
	910.15	Syphons → See data sheet AC 09.06
	910.13	Overpressure protector → See data sheet AC 09.04
	IV1	Needle valve and multiport needle valve → See data sheet AC 09.22
	IV2	Block-and-bleed valve → See data sheet AC 09.19
	IVM	Monoflange, process and instrument version → See data sheet AC 09.17
	BV	Ball valve, process and instrument version → See data sheet AC 09.28

Ordering information

Model / Nominal size / Scale range / Process connection /
Connection location / Options



© 02/1995 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.



Bourdon tube pressure gauge, stainless steel

Compact version, NS 40 [1 ½"], 50 [2"] and 63 [2 ½"]

Model 131.11

WIKA data sheet PM 01.05



For further approvals,
see page 5

Applications

- For gaseous and liquid aggressive media that are not highly viscous or crystallising, also in aggressive environments
- Machine building and general plant construction
- Indication of failure alarm on gas cylinders
- CDA (Clean Dry Air) applications

Special features

- Case and wetted parts from stainless steel
- Version per EN 837-1 or ASME B40.100
- Cost-effective and reliable
- Scale ranges from 0 ... 1 to 0 ... 1,000 bar [0 ... 15 to 0 ... 15,000 psi]



Bourdon tube pressure gauge model 131.11.050 with dual scale bar/psi

Configurator



Standard articles



Description

The compact model 131.11 Bourdon tube pressure gauge is constructed with a case and wetted parts from stainless steel.

The modular design enables a multitude of combinations of process connections, nominal sizes and scale ranges. Due to this high variance, the instrument is suitable for use in a wide range of applications within industry.

The instrument is frequently used as a failure alarm indicator on gas cylinders. With its compact design and moderate purchase costs, the pressure gauge also qualifies for machine-building and plant-construction applications.

Due to the use of high-quality stainless steel materials and its robust design, the instrument is suitable for liquid and gaseous media, also in aggressive environments.

For mounting in control panels, the pressure gauges can be fitted with a surface mounting flange or with a triangular profile ring and mounting bracket.

Specifications

Basic information		
Standard	EN 837-1 ASME B40.100	
	→ For information on the “Selection, installation, handling and operation of pressure gauges”, see technical information IN 00.05.	
Special design feature	Oil- and grease-free For oxygen, oil- and grease-free ¹⁾ Silicone-free Version for ammonia plants With temperature scale for refrigerant R 717 (NH3) in °C Scale range: -1 ... 0 ... 15 bar or -1 ... 0 ... 26 bar	
Nominal size (NS)	Ø 40 mm [1 ½"] Ø 50 mm [2"] Ø 63 mm [2 ½"]	
Connection location	Lower mount (radial) Centre back mount	
Window	Polycarbonate, snap-fitted in case Laminated safety glass ²⁾ Instrument glass ²⁾	
Case		
Design	Lower mount (radial)	Safety level “S1” per EN 837-1: With blow-out device at case circumference, 6 o'clock
	Centre back mount	Safety level “S0” per EN 837-1 Safety level “S1” per EN 837-1: With blow-out device in case back
Material	Stainless steel	
Ring	Without Slip-on bezel, stainless steel Slip-on bezel, stainless steel, polished	
Mounting	Without Panel mounting flange, polished stainless steel ³⁾ Triangular profile ring with mounting bracket, polished stainless steel ³⁾ Surface mounting flange, stainless steel ⁴⁾	
Movement	Stainless steel	

1) Not available for NS 63 [2 ½"]

2) Only available with slip-on bezel

3) Only available with centre back mount

4) Only available for NS 63 [2 ½"]

Measuring element	
Type of measuring element	Bourdon tube, C-type or helical type
Material	Stainless steel 1.4404 (316L)
Leak tightness	Helium tested, leakage rate: < 5 · 10 ⁻³ mbar l/s

Accuracy specifications	
Accuracy class	
■ EN 837-1	■ Class 2.5 ■ Class 1.6
	■ ±3 % of measuring span (grade B) ■ ±2 % of measuring span (grade A)
■ ASME B40.100	
Temperature error	On deviation from the reference conditions at the measuring system: ≤ ±0.4 % per 10 °C [≤ ±0.4 % per 18 °F] of full scale value
Reference conditions	
Ambient temperature	+20 °C [68 °F]

Scale ranges, gauge pressure

bar	
0 ... 1	0 ... 40
0 ... 1.6	0 ... 60
0 ... 2	0 ... 70
0 ... 2.5	0 ... 100
0 ... 4	0 ... 140
0 ... 6	0 ... 160
0 ... 7	0 ... 200
0 ... 10	0 ... 250
0 ... 14	0 ... 315
0 ... 16	0 ... 400
0 ... 20	0 ... 600
0 ... 25	0 ... 700 ¹⁾
0 ... 30	0 ... 1,000 ¹⁾

kPa	
0 ... 100	0 ... 4,000
0 ... 160	0 ... 6,000
0 ... 200	0 ... 7,000
0 ... 250	0 ... 8,000
0 ... 300	0 ... 10,000
0 ... 400	0 ... 14,000
0 ... 600	0 ... 16,000
0 ... 700	0 ... 20,000
0 ... 800	0 ... 25,000
0 ... 1,000	0 ... 40,000
0 ... 1,400	0 ... 60,000
0 ... 1,600	0 ... 70,000 ¹⁾
0 ... 2,500	0 ... 80,000 ¹⁾
0 ... 3,000	0 ... 100,000 ¹⁾

1) Only available for NS 63 [2 ½"]

psi	
0 ... 15	0 ... 800
0 ... 30	0 ... 1,000
0 ... 60	0 ... 1,500
0 ... 100	0 ... 2,000
0 ... 150	0 ... 3,000
0 ... 160	0 ... 4,000
0 ... 200	0 ... 5,000
0 ... 250	0 ... 6,000
0 ... 300	0 ... 7,500
0 ... 400	0 ... 10,000 ¹⁾
0 ... 500	0 ... 15,000 ¹⁾
0 ... 600	-

MPa	
0 ... 0.1	0 ... 4
0 ... 0.16	0 ... 6
0 ... 0.20	0 ... 7
0 ... 0.25	0 ... 10
0 ... 0.4	0 ... 14
0 ... 0.6	0 ... 16
0 ... 0.7	0 ... 20
0 ... 1.0	0 ... 25
0 ... 1.4	0 ... 31.5
0 ... 1.6	0 ... 40
0 ... 2	0 ... 60
0 ... 2.5	0 ... 70 ¹⁾
0 ... 3	0 ... 100 ¹⁾

Vacuum and compound scale ranges

bar	
-1 ... 0	-1 ... +7
-1 ... +0.6	-1 ... +9
-1 ... +1	-1 ... +10
-1 ... +1.5	-1 ... +15
-1 ... +3	-1 ... +25
-1 ... +5	-1 ... +30

kPa	
-100 ... 0	-100 ... +700
-100 ... +60	-100 ... +900
-100 ... +100	-100 ... +1,000
-100 ... +150	-100 ... +1,500
-100 ... +200	-100 ... +2,400
-100 ... +500	-100 ... +3,000

psi	
-30 inHg ... 0	-30 inHg ... +100
-30 inHg ... +15	-30 inHg ... +160
-30 inHg ... +30	-30 inHg ... +200
-30 inHg ... +60	-30 inHg ... +300

MPa	
-0.1 ... 0	-0.1 ... +0.5
-0.1 ... +0.06	-0.1 ... +0.7
-0.1 ... +0.1	-0.1 ... +0.9
-0.1 ... +0.15	-0.1 ... +1
-0.1 ... +0.2	-0.1 ... +1.5
-0.1 ... +0.3	-0.1 ... +2.4
-0.1 ... +0.4	-0.1 ... +3

Further details on: Scale ranges	
Unit	■ bar ■ psi ■ kPa ■ MPa ■ kg/cm²
Vacuum resistance	■ Without ■ Vacuum-resistant to -1 bar
Dial	
Scale colour	Black
Material	Aluminium
Customer-specific version	■ Without ■ With temperature scale for refrigerant, e.g. for NH₃: R 717 Other scales or customer-specific dials, e.g. with red mark, circular arcs or circular sectors, on request → Alternatively, adhesive label set for red and green circular arcs; see data sheet AC 08.03
Pointer	Aluminium, black
Pointer stop pin	■ Without ■ At zero point ■ At 6 o'clock

→ Other scale ranges on request

Process connection	
Standard	■ EN 837-1 ■ ISO 7 ■ ANSI/B1.20.1
Size	
EN 837-1	■ G ¼ B, male thread ■ G ½ B, male thread ■ M14 x 1.5, male thread
ANSI/B1.20.1	■ ¼ NPT, male thread ■ ½ NPT, male thread
ISO 7	■ R ¼, male thread ■ R ½, male thread
Restrictor	■ Without ■ Ø 0.6 mm [0.024"], stainless steel ■ Ø 0.3 mm [0.012"], stainless steel
Material (wetted)	
Process connection	■ Stainless steel 1.4571 (316Ti) ■ Stainless steel 1.4404 (316L)
Bourdon tube	Stainless steel 1.4404 (316L)

→ Other process connections on request

Operating conditions	
Medium temperature	-40 ... +100 °C [-40 ... +212 °F]
Ambient temperature	-40 ... +60 °C [-40 ... +140 °F]
Pressure limitation	
Steady	3/4 x full scale value
Fluctuating	2/3 x full scale value
Short time	Full scale value
Ingress protection per IEC/EN 60529	■ IP54 ■ IP65 ¹⁾

1) Only selectable for scale ranges from 0 ... 16 bar [0 ... 250 psi] and centre back mount

Approvals

Logo	Description	Region
	EU declaration of conformity Pressure equipment directive PS > 200 bar, module A, pressure accessory	European Union
-	CRN Safety (e.g. electr. safety, overpressure, ...) For scale ranges ≤ 1,000 bar	Canada

Optional approvals

Logo	Description	Region
 	EU declaration of conformity ATEX directive Hazardous areas - Ex h Gas II 2G Ex h IIC T6 ... T1 Gb X Dust II 2D Ex h IIC T85°C ... T100°C Db X	European Union
	PAC Kazakhstan Metrology, measurement technology	Kazakhstan
-	MChS Permission for commissioning	Kazakhstan
	PAC Ukraine Metrology, measurement technology	Ukraine
	PAC Uzbekistan Metrology, measurement technology	Uzbekistan
-	PAC China Metrology, measurement technology	China
-	KBA ²⁾ Automotive Components for motor vehicles using natural gas (CNG/LNG) – UN no. R 110	International

1) Not available for NS 63 [2 ½"]

2) Not available for all versions

Manufacturer's declaration

Logo	Description
-	Pressure equipment directive (PED) for maximum allowable pressure PS ≤ 200 bar
-	Suitability of wetted materials for drinking water in accordance with the European 4MS initiative


Certificates (option)

Certificates	
Certificates	■ 2.2 test report per EN 10204 (e.g. state-of-the-art manufacturing, indication accuracy) ■ 3.1 inspection certificate per EN 10204 (e.g. indication accuracy)
Recommended calibration interval	1 year (dependent on conditions of use)

→ For approvals and certificates, see website

Dimensions in mm [in]

Model 131.11, lower mount (radial)

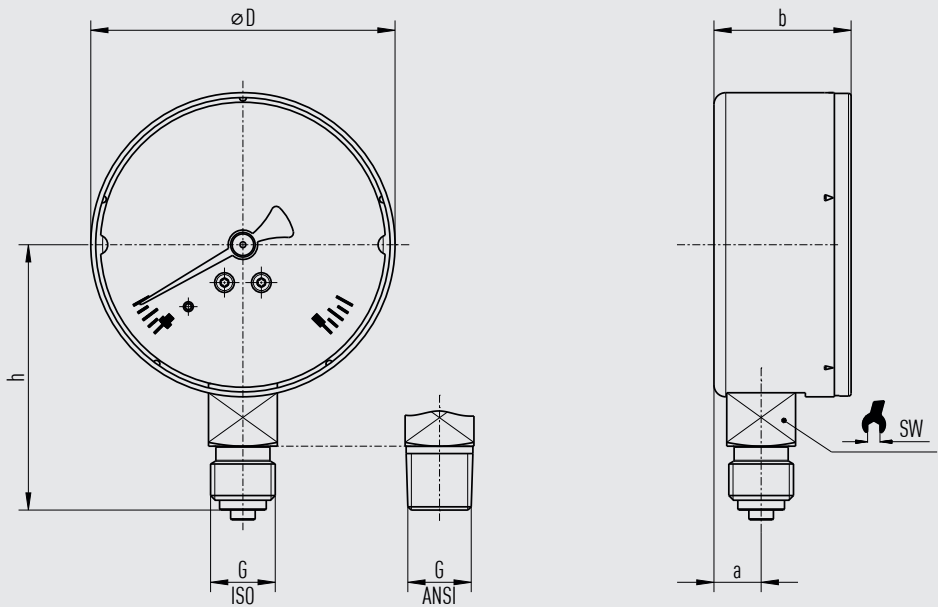


2184087.02

NS	G ¹⁾	Dimensions in mm [in]					Weight in kg [lb]
		D	h ±1 [0.04]	a	b ±1 [0.04]	SW	
40 [1.5"]	G ½ B, ½ NPT	39 [1.54]	36 [1.42]	9 [0.35]	25 [0.98]	14 [0.55]	0.05 [0.11]
	G ¼ B, ¼ NPT	39 [1.54]	39 [1.54]	9 [0.35]	25 [0.98]	14 [0.55]	0.05 [0.11]
50 [2"]	G ½ B, ½ NPT	49 [1.93]	44 [1.73]	9 [0.35]	29 [1.41]	14 [0.55]	0.09 [0.2]
	G ¼ B, ¼ NPT	49 [1.93]	47 [1.85]	9 [0.35]	29 [1.41]	14 [0.55]	0.09 [0.2]
63 [2 ½"]	G ½ B, ½ NPT	62 [2.44]	51 [2.01]	10 [0.39]	28 [1.1]	14 [0.55]	0.12 [0.26]
	G ¼ B, ¼ NPT	62 [2.44]	54 [2.13]	10 [0.39]	28 [1.1]	14 [0.55]	0.12 [0.26]

1) The G ½ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

Model 131.11, centre back mount

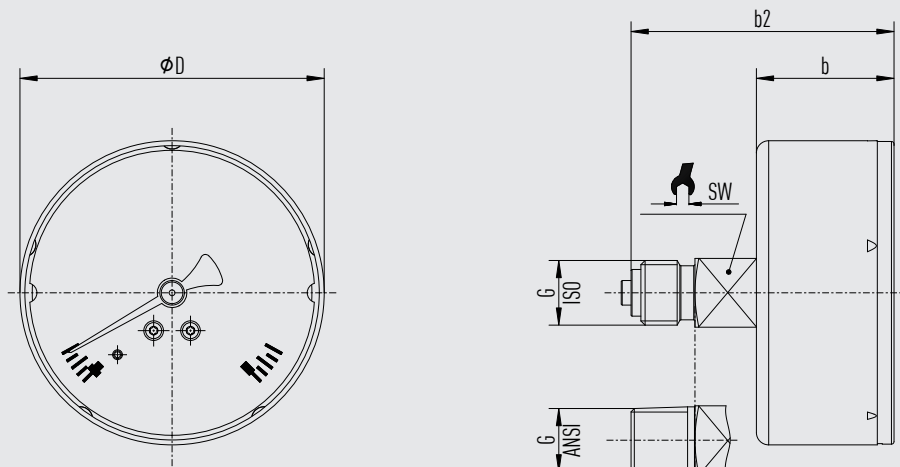

2184109.02

NS	G ¹⁾	Dimensions in mm [in]				Weight in kg [lb]
		D	b2	b ±1 [0.04]	SW	
40 [1.5"]	G ½ B, ½ NPT	39 [1.54]	52.5 [2.07]	27.5 [1.09]	14 [0.55]	0.05 [0.11]
	G ¼ B, ¼ NPT	39 [1.54]	52.5 [2.07]	27.5 [1.09]	14 [0.55]	0.05 [0.11]
50 [2"]	G ½ B, ½ NPT	49 [1.93]	53.5 [2.11]	29 [1.14]	14 [0.55]	0.09 [0.2]
	G ¼ B, ¼ NPT	49 [1.93]	53.5 [2.11]	29 [1.14]	14 [0.55]	0.09 [0.2]
63 [2 ½"]	G ½ B, ½ NPT	62 [2.44]	53.5 [2.11]	28 [1.1]	14 [0.55]	0.12 [0.26]
	G ¼ B, ¼ NPT	62 [2.44]	53.5 [2.11]	28 [1.1]	14 [0.55]	0.12 [0.26]

1) The G ½ B process connection of this instrument is manufactured without a centring spigot and with a thread runout instead of a thread undercut.

Ordering information

Model / Nominal size / Connection location / Scale range /
Process connection / Options



© 02/2009 WIKA Alexander Wiegand SE & Co. KG, all rights reserved.
The specifications given in this document represent the state of engineering at the time of publishing.
We reserve the right to make modifications to the specifications and materials.
In case of a different interpretation of the translated and the English data sheet, the English wording shall prevail.



WIKA Alexander Wiegand SE & Co. KG
Alexander-Wiegand-Straße 30
63911 Klingenberg/Germany
Tel. +49 9372 132-0
info@wika.de
www.wika.de