


DIAFRAMMI CALIBRATI PER FLANGE
ORIFICE PLATES FOR FLANGE




DIAFRAMMI CALBRATI PER FLANGE ANSI TIPO RF
ORIFICE PLATES FOR ANSI FLANGE TYPE RF

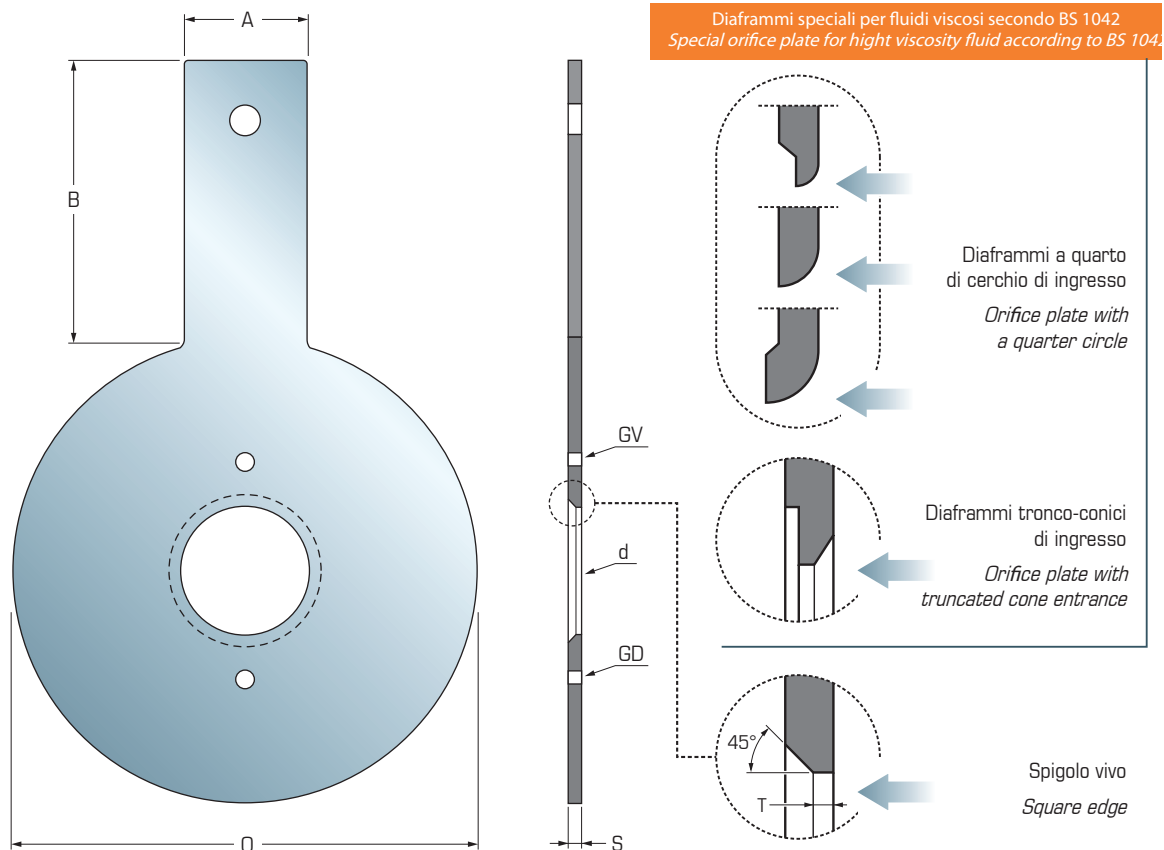


	O CLASSE - ANSI									
DN Size	150	300	600	900	1500	2500	S mm	T mm	A mm	B mm
1"	-	73,0	73,0	79,4	79,4	85,7	3	1,0	30	100
1" 1/2	-	95,3	95,3	98,4	98,4	117,5	3	1,0	30	100
2"	-	111,1	111,1	142,9	142,9	146,4	3	1,0	30	100
3"	-	149,2	149,2	168,3	174,6	196,9	3	1,5	30	100
4"	-	181,0	193,7	206,4	209,6	235,0	3	1,5	30	150
6"	-	250,8	266,7	288,9	282,6	315,5	3	1,5	30	150
8"	-	308,0	320,7	362,0	352,4	387,4	6	3,5	30	150
10"	-	362,0	400,1	435,0	435,0	476,3	6	3,5	30	150
12"	-	422,6	457,2	498,5	520,7	549,3	6	3,5	30	150
14"	-	485,8	492,1	520,7	577,9	-	10	6,0	40	150
16"	-	539,8	565,2	574,7	641,4	-	10	6,0	40	150
18"	549,3	596,9	612,8	638,2	704,9	-	12	8,0	40	175
20"	606,4	654,1	682,6	698,5	755,7	-	12	8,0	40	175
24"	717,6	774,7	790,6	838,2	901,7	-	16	10,0	40	200

Tipo - Type	Descrizione	Description
GD	Foro di spurgo: per Vapori e Gas	Drain hole: for Steam and Gases
GV	Foro di sfogo: per Liquidi	Vent hole: for Liquid

DIAFRAMMI PER FLUIDI SPORCHI O CONTENENTI IMPURITÀ
ORIFICE PLATES FOR DIRTY FLUID OR CONTAINING IMPURENESS

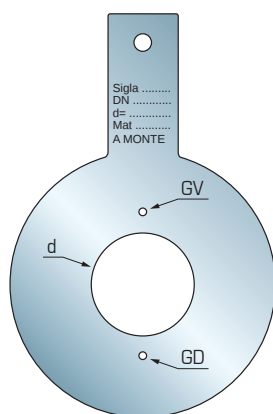

- Concentrico
- Concentric

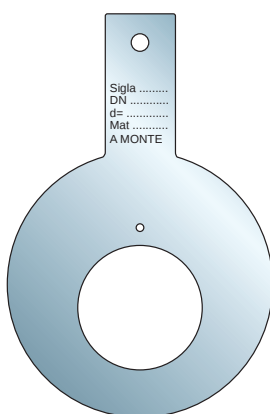

- Eccentrico
- Eccentric



- Segmentale
- Segmental

Fori di spurgo e sfiato
Drain and vent hole


d		GV - GD
da from	a to	dimensione foro mm Hole dimension mm
< 25.400		-
25.400	88.900	2.38
88.901	104.775	3.18
104.776	127.000	3.97
127.001	152.400	4.76
152.401	171.450	5.56
171.451	190.500	6.35
190.501	212.725	7.14
212.726	234.950	7.94
234.951	254.000	8.73
254.001	276.225	9.53
276.226	295.275	10.32
295.276	317.500	11.11
317.501	336.550	11.91
< 336.550		12.70

Tolleranze foro calibrato **d** in accordo:
ISA RP3.2, ISO 5167, API-RP550, ASME PTC19.5

Orifice bore **d** tolerances in according:
ISA RP3.2, ISO 5167, API-RP550, ASME PTC19.5

d		
da from	a to	Tolleranza ± Tolerance ±
< 6.350		0.007
6.350	9.525	0.012
9.526	12.700	0.015
12.701	15.875	0.020
15.876	19.050	0.022
19.051	22.225	0.025
22.226	25.400	0.030
25.401	31.750	0.035
31.751	38.100	0.043
38.101	44.450	0.050
44.451	127.000	0.063
< 127.000		0.0005 d

DIAFRAMMI CALIBRATI PER FLANGE ANSI TIPO RJ
RJ ORIFICE PLATES FOR ANSI FLANGES

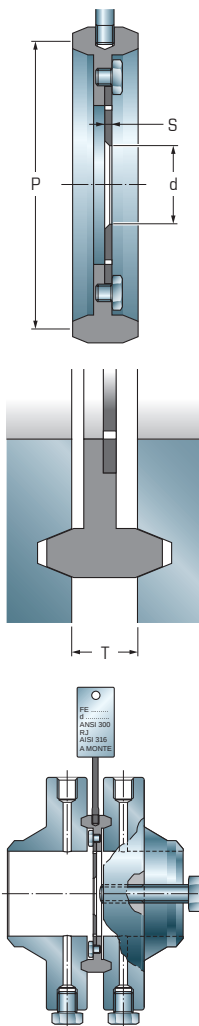

ANSI					RJ	P	T	S
300	600	900	1500	2500	No.	mm	mm	mm
1"	1"		1"		R16	50,8	15,9	3
				1"	R18	60,3	15,9	3
1" 1/2	1" 1/2		1" 1/2		R20	68,3	15,9	3
2	2			1" 1/2	R23	82,5	15,9	3
			2		R24	95,25	15,9	3
2" 1/2	2" 1/2			2	R26	101,6	15,9	3
			2" 1/2		R27	107,9	15,9	3
				2" 1/2	R28	111,1	15,9	3
3"	3"	3"			R31	123,8	15,9	3
				3"	R32	127,0	15,9	3
			3"		R35	136,5	15,9	3
4"	4"	4"			R37	149,2	15,9	3
				4"	R38	157,2	15,9	3
			4"		R39	161,9	15,9	3
5"	5"	5"			R41	181,0	15,9	3
				5"	R42	190,5	15,9	3
			5"		R44	193,7	15,9	3
6"	6"	6"			R45	211,1	15,9	3
			6"		R46	211,1	15,9	3
				6"	R47	228,6	15,9	3
8"	8"	8"			R49	269,9	19,1	6
			8"		R50	269,9	19,1	6
				8"	R51	279,4	19,1	6
10"	10"	10"			R53	323,8	19,1	6
			10"		R54	323,8	19,1	6
				10"	R55	342,9	19,1	6
12"	12"	12"			R57	381,0	19,1	6
			12"		R58	381,0	19,1	6
				12"	R60	406,4	19,1	6
14"	14"				R61	419,1	22,2	10
		14"			R62	419,1	22,2	10
			14"		R63	419,1	22,2	10
16"	16"				R65	469,9	22,2	10
		16"			R66	469,9	22,2	10
			16"		R67	469,9	22,2	10
18"	18"				R69	533,4	25,4	12
		18"			R70	533,4	25,4	12
			18"		R71	533,4	25,4	12
20"	20"				R73	584,2	25,4	12
		20"			R74	584,2	25,4	12
			20"		R75	584,2	25,4	12
24"	24"				R77	692,1	28,6	16
		24"			R78	692,1	28,6	16
			24"		R79	692,1	28,6	16

Come ordinare: DIAFRAMMI CALIBRATI How to order: ORIFICE PLATE

1	- 150 -	RF -	01	- 06 -	03
Diametro Nominale Size	Pressione ANSI - Rating	Accoppiamento Facing	Tipo - Type	Materiali Material	Spessori Standatd Tickness
1" 14"	150 - 150	Faccia risalto Flat-face - RF	Concentrico - Concentric - 01	AISI 304 - 04	1" - 6" 3mm - 03
1" 1/2 16"	300 - 300		Eccentrico - Eccentric - 02	AISI 304 L - 06	8" - 12" 6mm - 06
2" 18"	600 - 600	Anello di giunzione Ring joint - RJ	Segmentale - Segmental - 03	AISI 316 - 16	14" - 16" 10mm - 10
3" 20"	900 - 900		Anello di giunzione - Ring joint - 04	AISI 316 L - 17	18" - 20" 12mm - 12
4" 22"	1500 - 1500	Altri a richiesta Other on req. - 00	Quarto di cerchio - Quarter circle - 05	MONEL - 400	24" - 30" 16mm - 16
6" 24"	2500 - 2500		Entrata conico - Conic entrance - 06	DUPLEX - 22	
8" 26"				HASTELLOY - 270	
10" 28"					
12" 30"					